


SA 2 Automation System

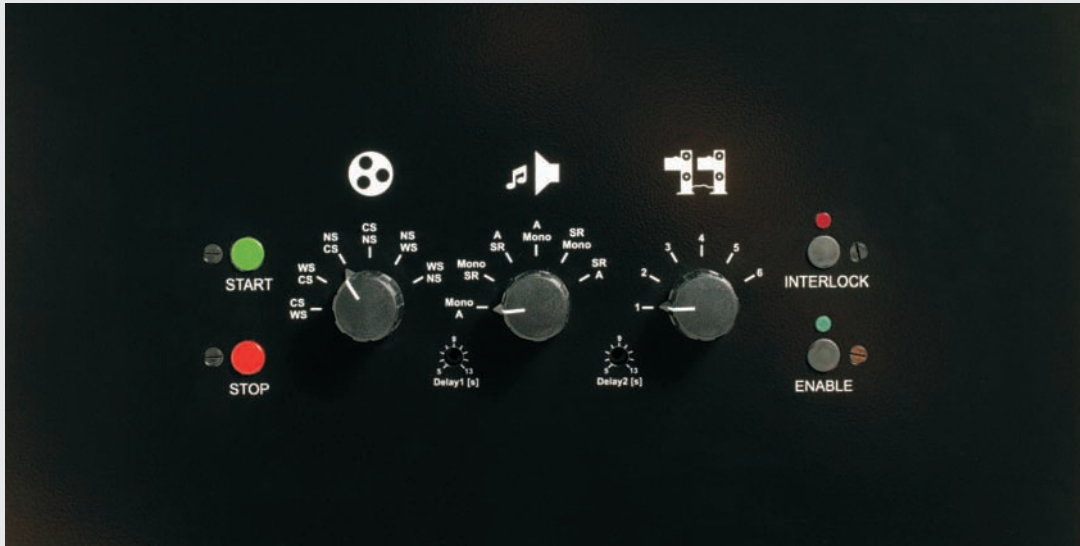

The SA 2 is an economical, basic automation for one projector and different auditorium functions.

The modular system can easily be expanded to control additional functions and devices. It is easy to operate and suitable for interlock operation.

Top Features

- » 2 sensors on the projector detect metal cue foils on film
- » Sensors can be disabled
- » Preset program routines for start /stop sequences and film break
- » Adjustable time delay between start/stop sequence functions
- » Up to 6 interlock groups
- » Preselection of 2 picture and 2 (analog) sound format combinations for format changes during the show
- » 6 selectable picture and sound format pairs
- » Simple rotary switches for selecting interlock group, picture and sound format pairs
- » Manual override during the show is possible
- » Film break safety routine for single and interlock operation
- » 14 dry contacts for projector functions and periphery
- » Optional status panels indicate: system ready (stand-by) / main program / film break
- » Expansion modules available for later upgrades
- » Sound format switching via RS-232 (CP 650) or by additional extension module
- » Available for installation in FP 30 and FP 50 projectors or in wall mount case

STA 5 / STA 10 Status Panel (option)

Status panels are available as an option.

- STA 5 can show the status of 5 cinemas
- STA 10 can show the status of 10 cinemas.



STA 10 status panel



SA 2 in a wall mount case

Possible Control Functions

Projector	Start / Stop
Dowser	Open / Close
Picture Format	NS / WS / CS
House Light	On / Preset / Off
Stage Light	On / Off
Curtain	Open / Close
Sound Format	Mono / Dolby A / Dolby SR / Dolby SRD
External Sound Sources	Nonsync 1 / Nonsync 2 / Mute