


SPT 5000 / SPT 5000 K

Spool Towers

The SPT 5000 and SPT 5000 K spool towers are stable and robust devices for film spools containing up to 5000 m (17,000 ft) of film (running time: approx. 3.25 hours).

The electronically controlled spool motors guarantee a constant, low film tension at any diameter and therefore minimum wear and tear on the film.

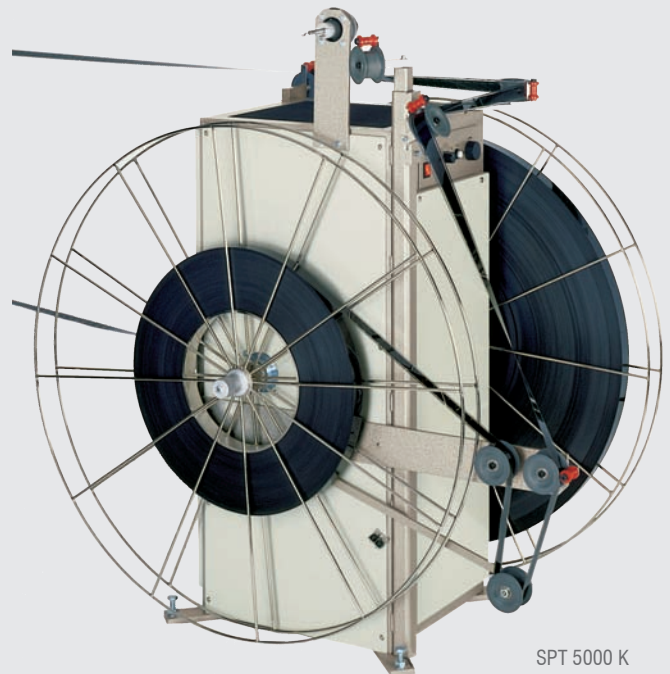

SPT 5000 K

Top Features

- » High, variable rewind speed (15 min. for 5,000 m / 17,000 ft at maximum speed)
- » Automatic stop after rewind
- » Electronically controlled spool motors for constant, low film tension prevent wear and tear on the film
- » Separate shaft for 600 m (2,000 ft) split reels
- » Robust welded steel frame
- » The SPT 5000 is available in right-hand or left-hand versions
- » The SPT 5000 requires little space, so placement against a wall is possible
- » The SPT 5000 K is ideal for limited heights or portable use
- » Sets of guide rollers available for different locations and distances from the projector
- » Easy installation and operation
- » Suitable for all 35 mm projectors
- » Just like all Kinoton products: absolutely reliable and virtually maintenance-free



SPT 5000



Operating panel

Technical Data

Mains Voltage	115 V / 120 V / 230 V / 240 V
Frequency	50 - 60 Hz
Power Input	400 VA
Nett Weight	» SPT 5000: 120 kg (270 lbs) » SPT 5000 K: 125 kg (280 lbs)
Gross Weight	» SPT 5000: 210 kg (470 lbs) » SPT 5000 K: 195 kg (430 lbs)
Film Spools	» Shaft diameter: 12.7 mm (0.5") » Core diameter: 28.0 mm (11.4") at minimum

See the Difference.



Kinoton GmbH
 Industriestrasse 20a
 82110 Germering / Germany
 Phone +49 (0)89 894446-0
 Fax +49 (0)89 8402002
 welcome@kinoton.de
 www.kinoton.com